

DATA SHEET

SP520A MULTI-LOCATION SPEAKER SYSTEM

Recreational Facilities
Transportation Terminals
Convention Centers
Correctional Facilities
Warehouse/Factories
Community Halls
Gymnasiums
Sports Arenas
Shopping Malls
Super Stores
Restaurants
Theatres
Schools
Churches

Octasound®
S O U N D
A B O V E
A L L



FULL FIDELITY - FOR BOTH VOICE AND MUSIC

The KDM SP520A is a full fidelity (45 Hz to 15 kHz) Multi-location Speaker System. The KDM SP520A tuned port enclosure contains a highly efficient 10" woofer matched to two compression horns and drivers. The frequency spectrum of the woofer and horns is determined by an internal crossover network that is optimized to maximize performance. This combination ensures full fidelity reproduction from an extremely compact multi-location speaker system.

HIGH SENSITIVITY - 99 dB PER WATT PER METER

The KDM SP520A is extremely sensitive with a Sound Pressure Level (S.P.L.) of 96 dB per watt at 1 meter. As a result, very little amplifier power is required to obtain the required sound pressure levels. At maximum RMS input power the KDM SP520A can produce 121 dB S.P.L. at one meter.

HIGH POWER HANDLING - 150 WATTS RMS / 300 WATTS PEAK

The KDM SP520A can withstand input power of 150 watts RMS. The KDM SP520A also contains a built-in, self -resetting thermal protective circuit. This protects the high frequency drivers from excessive and distorted (10% T.H.D.) input levels.

WIDE COVERAGE AREA - 180° X 120°

The KDM SP520A provides coverage over a 180° Horizontal and 120° Vertical plane. These wide dispersion characteristics will permit a large area to be covered by a single KDM SP520A.

SMALL AND COMPACT - 12 INCHES HIGH x 14¼ INCHES DEEP / 40 LBS

The KDM SP520A is only 12 inches (30.5 cm) high x 16 inches (36.7 cm) deep and weighs 40 lbs (18.4kg). The KDM SP520A can be installed in low ceiling areas and close to lights without casting shadows as well as mounted on walls with very little protrusion from the wall. The low weight permits suspension using readily available hardware such as closed link chains, wire rope, etc. The combination of small dimensions and low weight permits the KDM SP520A to be shipped inexpensively.



Technical Specifications

Frequency Response:	45 Hz to 15 kHz ± 10 dB (on axis) 50 Hz to 10 kHz ± 6 dB (on axis)
Optimum Power:	50 to 120 watts RMS total.
Power Handling:	150 watts RMS total, 300 watts peak, (Total Harmonic Distortion less than 10%)
Impedance:	8 ohms nominal.
Dispersion:	180° Horizontal, 120° Vertical. ± 6 dB Level 100 Hz to 10 kHz.
Sensitivity:	99 dB/watt/meter on axis, pink noise 100 Hz to 10 kHz averaged.
Maximum S.P.L.:	121 dB RMS / 124 dB Peak at 1 meter.


Octasound Speakers and Sound System Modules are manufactured by the award winning company KDM Electronics Inc. With over 25 years of experience, KDM can design a turn-key sound system to meet or exceed your sound requirements.

by KDM Electronics


SP520A MULTI-LOCATION SPEAKER SYSTEM

Physical Specifications


Temperature Range:	-20°C to 55°C (-4°F to 131°F)
Humidity Range:	0% to 100% Non Condensing
Dimensions:	See Diagrams (Not to Scale, Tolerance $\pm 1/4"$)
Weight:	40 lbs (18.4 kg)
Material:	Exterior Treated Wood Composite Panel
Mounting Hardware:	Top Panel: Four 1 1/2" Eye Nuts, 3/4" I.D. Eye 1/4 x 20 Thread Rear Panel: Four 1 1/2" Eye Nuts, 3/4" I.D. Eye 1/4 x 20 Thread
Shipping Weight:	50 lbs (22.7 kg)
Shipping Dimension:	24" (61cm) L x 14" (35.6cm) W, x 18" (46cm) H

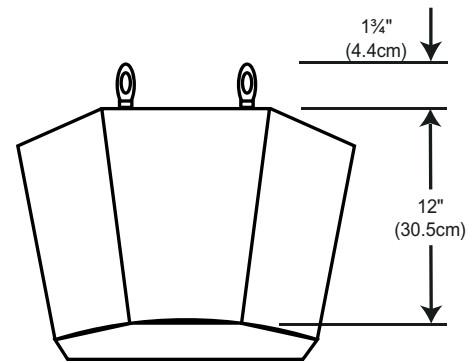


Front View

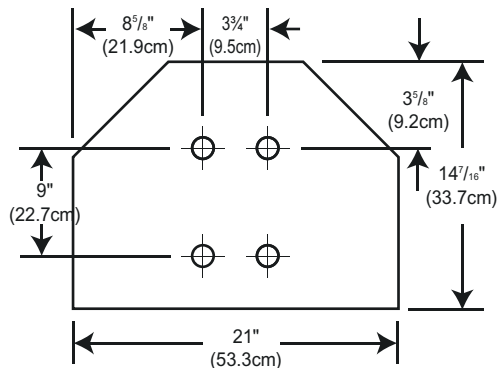

Top View and Mounting Hardware



Bottom View

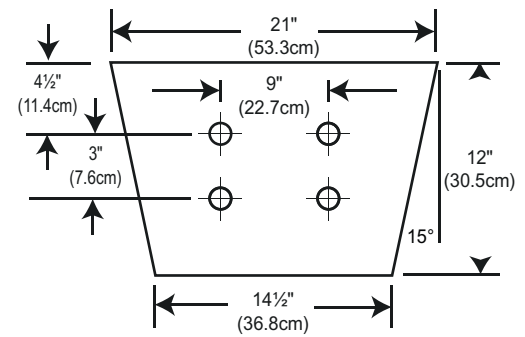

Rear View and Mounting Hardware

Architects and Engineers Specifications

The loudspeaker shall be a two-way speaker system containing a 10" (254 mm) diameter, low frequency driver, with a 2" (50 mm), 8 ohm voice coil, and a magnet weight of 50 ounces (1.42 kg) minimum, plus, two high frequency 6" x 6" (150 mm x 150 mm) wide dispersion exponential compression horns & drivers with a 1.8" (46 mm) voice coil and a barium ferrite magnet that weighs 15 ounces (429 g) minimum. The voice coil shall be manufactured of high temperature wire wound on a Titanium diaphragm and Kapton® bobbin to reduce overheating and voice coil rub. The horns and drivers shall have a 1" (25 mm) throat diameter. These components shall all be contained within a tuned port bass enclosure. The sensitivity shall be 99 dB per watt per meter. The overall speaker system shall contain one crossover network that separates the low and high frequency spectrum at a crossover point of 2 kHz $\pm 15\%$. The internal crossover shall have a built in thermal protective circuit to prevent damage from occurring at power levels up to 300 watts of peak power. The overall speaker system shall be capable of withstanding power levels up to 150 watts RMS, with a total harmonic distortion of less than 10%. The total impedance of the speaker system shall be 8 ohms nominal. The speaker shall contain a perforated metal speaker grill to protect the bass speaker. The enclosure shall be manufactured from 3/4" (19 cm) moisture resistant wood composite with all joints secured with waterproof glues. A sealant, primer and durable industrial textured finish shall be applied to the enclosure. All exposed metal must be aluminum, stainless steel, plated or painted. Four 1 1/2 inch eye nuts shall be provided for mounting on the top cover and four 1 1/2 inch eye nuts shall be provided for mounting on the rear panel. The complete speaker shall weigh a maximum of 40 lbs. (18.4 kg), with the following maximum dimensions: top width 21" (53.3 cm), bottom width 14 1/2" (36.8 cm) and height 12" (30.5 cm) + 1 3/4" (4.4 cm) for mounting hardware.

The loudspeaker shall be KDM Electronics Incorporated Model SP520A.

Ordering Information

SP520A - XX (where XX specifies color). WH = White Low Sheen Splatter Finish (Standard)

Other colors and Veneers available upon request. Example: BK = Black, OV = Oak Veneer

KDM Electronics Incorporated reserves the right at any time to make changes in product design, components and specifications, as may be warranted by progress in technology.



Octasound
S O U N D A B O V E A L L

KDM Electronics Inc.
931 Progress Avenue, Unit #12
Toronto, Ontario
Canada, M1G 3V5

Tel: (416) 439-7158
Toll Free: 1-800-567-6282
Fax: (416) 439-7232
Web Site: www.octasound.com
E-Mail: kdm@octasound.com