


TX120A

120, 60, 30, Watt / 70 Volt Transformer

1. Mount transformer using the #10 x 1/2" screws provided.
2. Connect 8 OHM **Secondary** wires from the transformer to the speakers terminals.
YELLOW Wire to Red Terminal (Positive) and **WHITE Wire to Black Terminal (Negative)**.
3. Connect 70 Volt speaker cable to 70 Volt primary wires on the transformer. Connect the **(Common) wire (Negative)** to **White (WH)** on the primary, and the **(Signal) wire (Positive)** to the required tap on the transformer.

120 Watts = RED
60 Watts = GREEN
30 Watts = BROWN
Common = BLACK

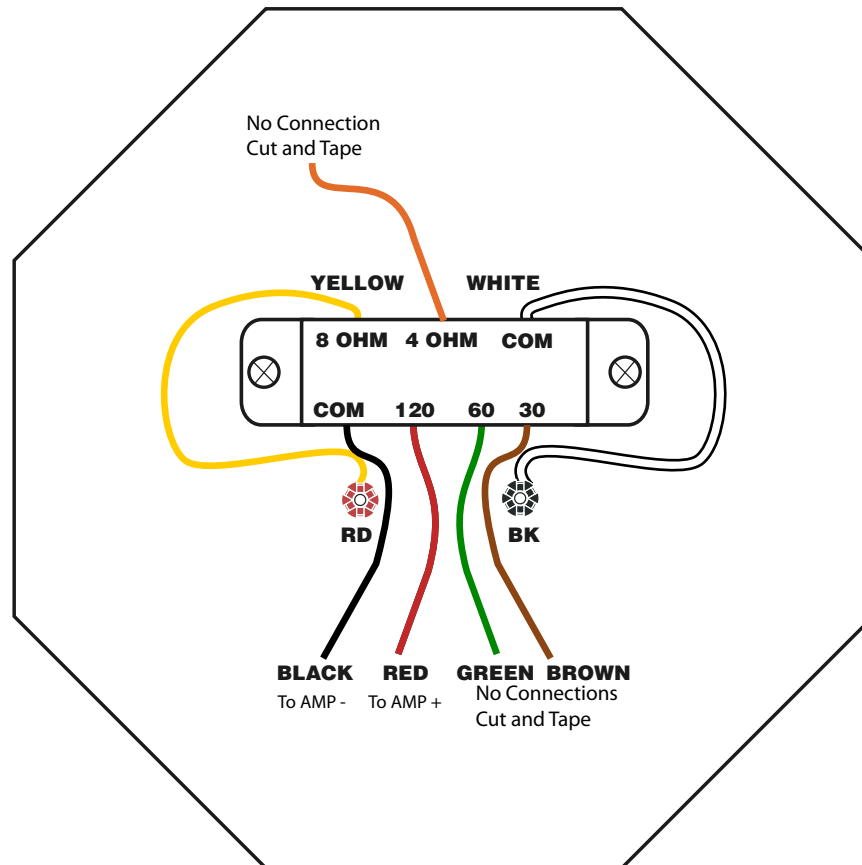

Octasound
SOUND ABOVE ALL

KDM Electronics Inc.
55 Mills Rd. Unit #3
Ajax, Ontario
Canada, L1S 2H2

Tel: (416) 439-7158
Toll Free: 1-800-567-6282
Fax: (416) 439-7232
Web Site: www.octasound.com
E-Mail: kdm@octasound.com